PANEL WIDTH · MM

430

476

510

582

BRONX

Dialogue conference System retractable monitor

BR-LSSC SERIES

Ultra-thin Retractable Lift Monitor

A motorised display that hides flush inside the conference table and rises only when the meeting needs it.

BR-15LSSC	BR-17LSSC	BR-18LSSC	BR-21LSSC
15.6"	17.3"	18.4" · 4K	21.5"



SHOWN RAISED · LEAD MODEL BR-15LSSC

OVERVIEW

Clean table. Screen on demand.

The ultra-thin monitor lift is built for advanced, multi-purpose paperless meeting rooms. During general sessions the LCD sits concealed inside the conference table, keeping the surface clean and uncluttered.

Screens raise individually, in groups, or all together — presenting conference content, prompts and images exactly as the agenda requires. Each lifter can be driven on its own or as part of a group through configuration.

FUNCTION

How it moves


01 **Raise, lower and stop** from the panel button, remote control or central controller.

02 At full height the LCD **auto-tilts** to its viewing angle.

03 As the screen lowers, the lifter **closes the table door** automatically.

04 **Anti-pinch protection** engages during descent.

05 Remote command over **RS-232 / RS-485** protocols.

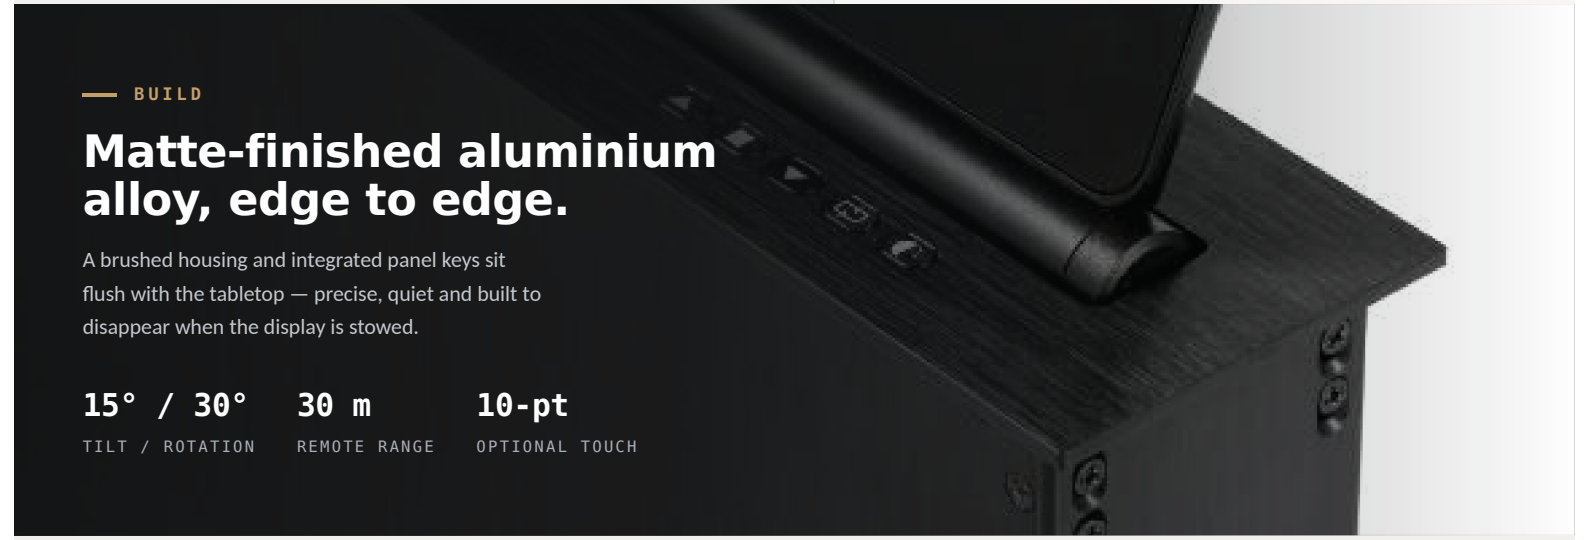

BUILD

Matte-finished aluminium alloy, edge to edge.

A brushed housing and integrated panel keys sit flush with the tabletop — precise, quiet and built to disappear when the display is stowed.

15° / 30°	30 m	10-pt
TILT / ROTATION	REMOTE RANGE	OPTIONAL TOUCH

SPECIFICATIONS

Technical detail

Resolution	1920 × 1080 / 4K (18")
Screen ratio	16 : 9
Brightness	350 nits
Touch screen (optional)	10-point
Control method	Panel · Remote · RS-232/485
Remote distance	30 m
Interfaces	HDMI · RS-232 · USB

Tilt / rotation angle	15° / 30°
Power supply	AC 110–220 V 50 Hz
LCD consumption	25 W
Lifting motor	18 W
Rotation motor	14 W
Working temperature	−10 °C – 45 °C
Working humidity	< 80 %

ORDER INFORMATION

Model range


SPECIFICATION	BR-15LSSC 15.6 INCH	BR-17LSSC 17.3 INCH	BR-18LSSC 18.4 INCH	BR-21LSSC 21.5 INCH
Panel size (mm)	430×70×3	476×70×3	510×70×3	582×70×3
Bottom case (mm)	415×60×562	462×60×562	495×60×647	567×60×647
Screen size	15.6"	17.3"	18.4"	21.5"
Product weight	7.5 kg	8.5 kg	9.5 kg	12 kg
Package size (cm)	48.8×13.2×66	53.8×13.2×66	56.5×13.2×74.5	63.5×13.2×74.5
Gross weight	8.5 kg	9.5 kg	10.5 kg	13 kg

HIGHLIGHTED COLUMN — DATASHEET LEAD MODEL

DIMENSIONS


Dimensional drawings

BR-15LSSC — 15.6"




W	H	D
430	562	415

BR-17LSSC — 17.3"



W	H	D
476	562	462

BR-18LSSC — 18.4"



W	H	D
510	647	490

BR-21LSSC — 21.5"



W	H	D
582	647	560

All dimensions in millimetres · front-panel width × case height × case depth.